

Reach-All, LLC

3980 Ironwood Circle, #407

Bradenton, FL 34209


Ph: 941-256-4165

Fax: 941-761-0026

www.reachallplatforms.com

tim@reachallplatforms.com

CraneMate™ Insul-Lift **The Universal Pin-On Crane Jib Boom and Basket with a Self-Contained Power Unit**

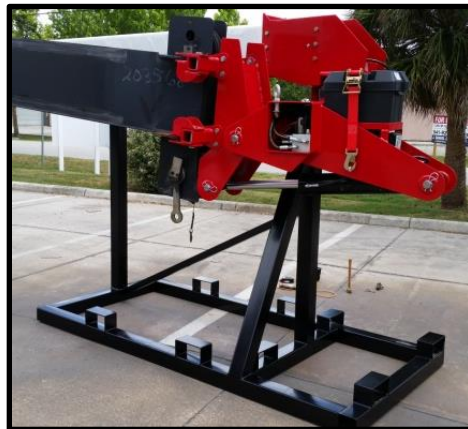

The patented *CraneMate™ Insul-Lift* jib boom pins to your crane's existing swing jib sheave head. The attachment design can transform many existing cranes (equipped with boom function radio remotes) into highly specialized insulated aerial lift bucket trucks.

The attachment has both hydraulic auto leveling of jib boom and basket along with 340 degrees of hydraulic rotation. The self-contained 12-volt hydraulic power package includes an integral radio remote proportional control package to control both jib boom and basket features.

Crane Requirements:

- Crane design must be approved for platform attachment
- Crane should have a swing jib sheave head design with 4 pin points
- A valid load capacity and work range chart for specific model of crane must be provided
- Work range and platform capacity are dependent on crane capacity
- One of several requirements to achieve ANSI 92.2 includes radio remote boom controls at platform

Reach-All's CraneMate™ Insul-Lift

Quickly transforms a crane into a one-of-a-kind state-of-the-art insulated aerial bucket truck.

Reach-All's **CraneMate™ Insul-Lift's** self-contained jib boom connects quickly to the head of a crane's swing jib with just **4 universal pins**. It comes complete with a battery-powered onboard hydraulic system and all platform controls.

Features include an electronic leveling sensor and radio remote controls for leveling override and proportional platform rotation control and a foot-actuated auto leveling enable control switch.

Capacity: 300 lb.

Jib Boom Lengths: 12', 14', & 16'

Basket Dimension: 24"H x 34"W x 42"D control docket pocket for crane radio remotes.

340° hydraulic rotation by a slewing ring bearing and hydraulic self-locking worm drive.

Storage Fixture with stirrups for fork lift.

Stows to crane's boom for road travel and instant action on the jobsite!

Optional 20' non-articulating jib boom with 180 degree horizontal rotation and interlock system.



Option:

- *After market conversion kit to meet ANSI 92.2 certification of crane to eliminate need for test weights when also equipped with platform controls*

For more info or videos view website www.reachallplatforms.com

CraneMate™ Insul-Lift

Expand Your Reach

With Reach-All